


Temporary Service Pole

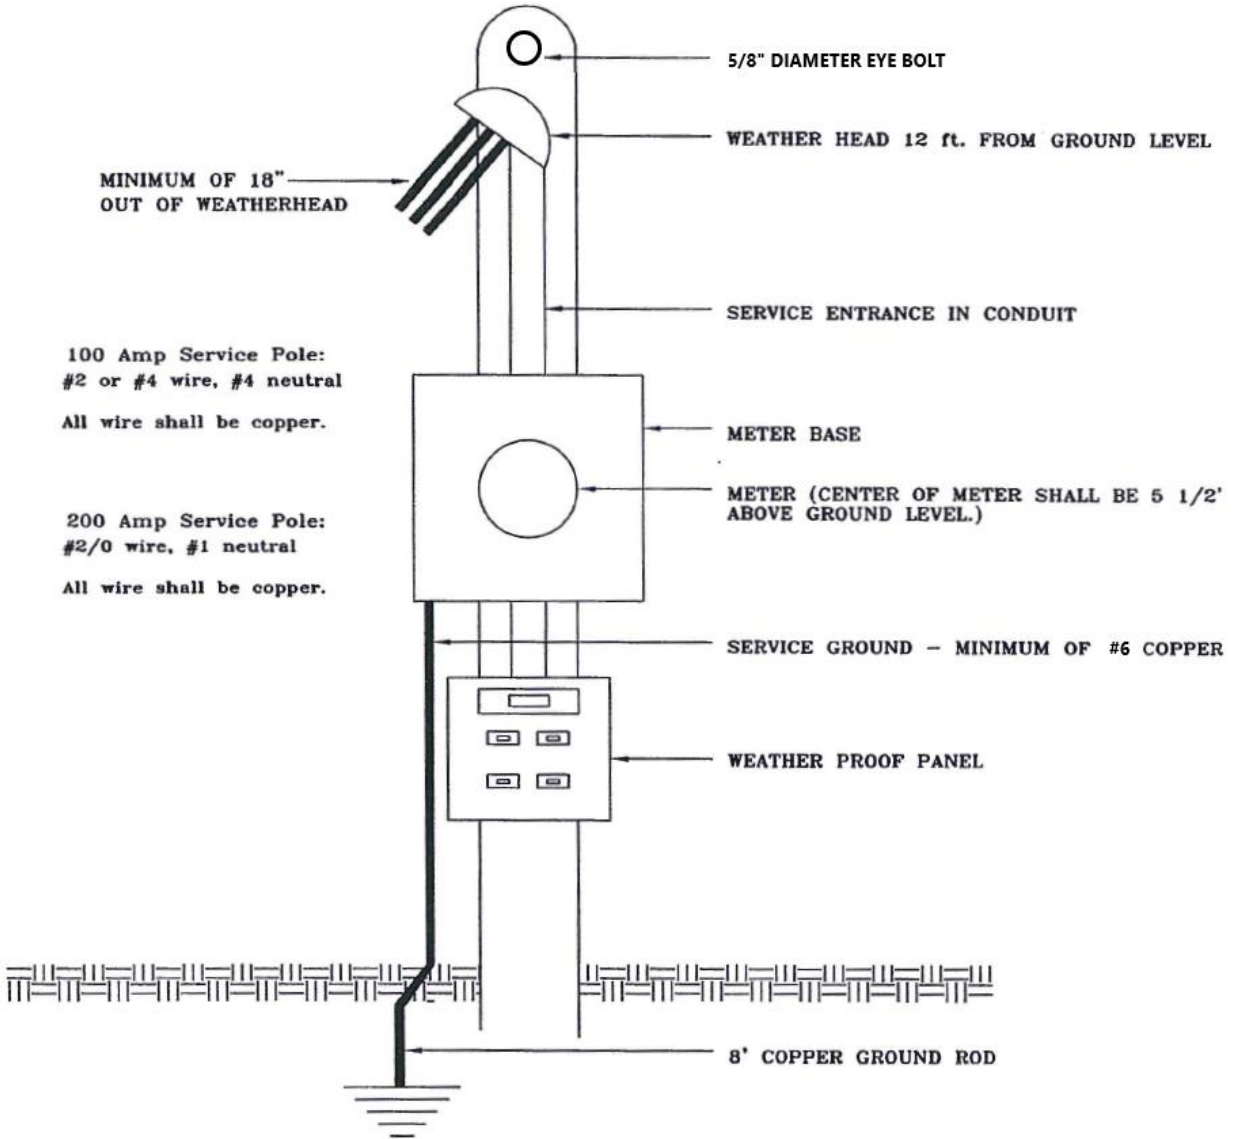

Notes:

1. BEA engineering staff must spot pole location prior to installation.
2. Pole must be a round treated pole or 6" x 6" lumber, minimum 16' in length, 4' in ground.
3. Weather head must be no less than 12' from ground.
4. Service wires must be 16' from ground if crossing a driveway.
5. Customer is responsible for installation of eye bolt above weather head.
 - a. Eye bolt must be 5/8" in diameter.
 - b. Length as required for installation.
6. All receptacle outlets on single-phase circuits for construction sites shall have approved ground-fault protection.
7. The meter pole must pass a State of Tennessee electrical inspection prior to BEA service connection.